




Proper size of Nano-SIM-Card:




Importantly, the Nano-SIM card must have air to all sides and can be moved in the modified SIM-Tray slightly, so that the flex cable is not pinched too much, otherwise please slide the NanoSim-Edges slightly!

Wichtig, ohne SIM-Karte die Knickkante scharf nachdrücken, damit der Adapter bequem entfernt werden kann.

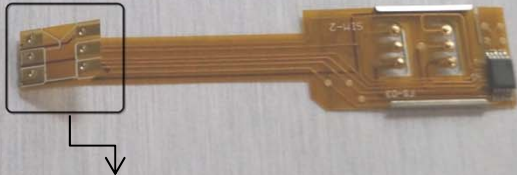

Do not open this area! It is forbidden!





- ✘ First of all, if the back of your iPhone has no protective film, the back must be taped in the area of the external part with two tape strip.
- ✘ 1. Install the adapter with the external SIM card 2 and push it in
- ✘ the provided metal rail receiving of the adapter.
- ✘ 2. Assemble the other end TOGETHER with SIM card 1 in the modified sim tray!
- ✘ Please only use the modified SIM-Tray.
- ✘ 3. Push the adapter along with the SIM card into the SIM slot. This should be done by the notch (see picture) can be used for threading, slanted start with the corner in this notch and then insert straight. Make sure that the SIM Tray exact flush. There will be a short period of time to get a feedback of your iPhone, e.g. "Search" will appear, etc.
- ✘ 4. Place the iPhone with the **LEFT** side of the case first, and handle the end of the Dual SIM Adapter carefully so that it will not unnecessarily bent sharply.
- ✘ 5. Close the case and if necessary switch off/ on your iPhone, if the SIM card will not recognized immediately.
- ✘ 6. Go to Settings-> Phone-> SIM Applications.
- ✘ 7. If you would like to remove the Dual SIM Adapter , take care and please ONLY "horizontal wagging" while pulling the Dual SIM Adapter and do not remove it via direct pull!